


## Conventional airfield lamps - Prefocus

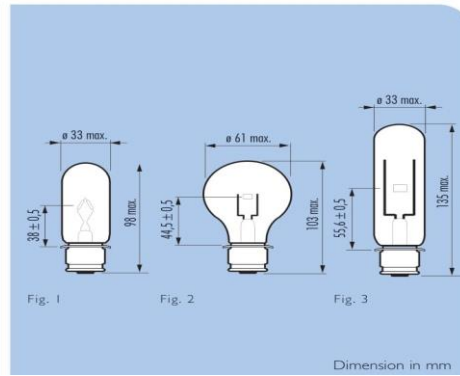

Current	Wattage	Base	Luminous flux Lm	Average life hrs.	LCL mm	Filament	Fig.
A	W						
6,6	30	P28s	450	1000	38	C-2V	1
<b>6,6</b>	<b>30</b>	<b>P28s</b>	<b>450</b>	<b>2000</b>	<b>38</b>		<b>1</b>
6,6	45	P28s	730	1000	38	C-2V	1
<b>6,6</b>	<b>45</b>	<b>P28s</b>	<b>730</b>	<b>2000</b>	<b>38</b>		<b>1</b>
6,6	100	P28s	1850	1000	38	C-2V	1
6,6	200	P28s	4600	200	44,5	CC-6	2
6,6	210	P28s	4500	300	55,6	C-13	3

CONVENTIONAL PREFOCUS